


LR6-60OPD 335~355M

Hi-MO X

High Efficiency Low LID Mono PERC with OVERLAP Technology to Deliver Superior Power with Aesthetic Appearance

10-year Warranty for Materials and Processing;
30-year Warranty for Extra Linear Power Output

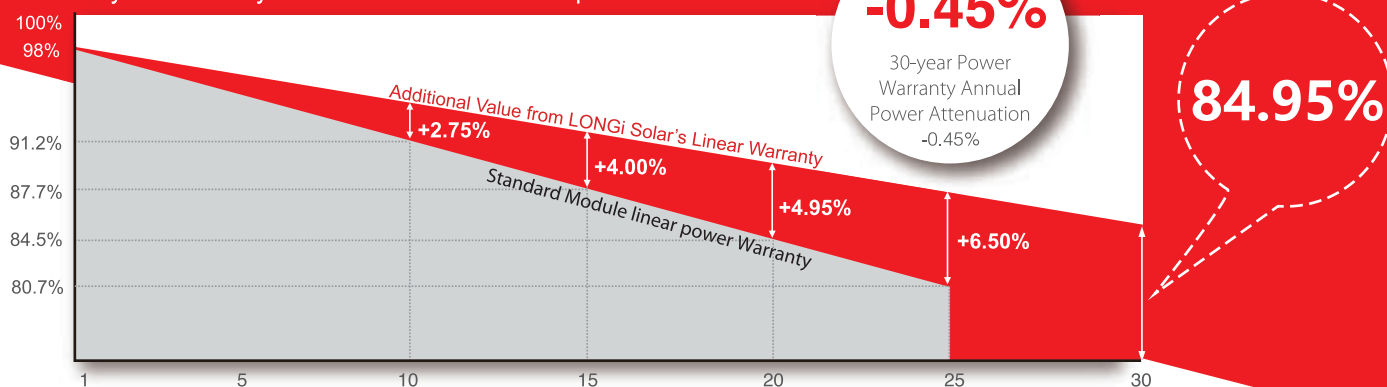

Complete System and Product Certifications

IEC 61215, IEC61730

ISO 9001:2008: ISO Quality Management System

ISO 14001: 2004: ISO Environment Management System

OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 20.1 %)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.45% year 2-30

Better energy yield with excellent low irradiance performance and temperature coefficient

Robust frame (30mm) withstands mechanical loading of 5400Pa for snow load on front and 2400Pa for wind load on rear side

LONGi Solar





Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

Made in China or Malaysia or Vietnam 20190701
LONGi Green Energy Technology Co., Ltd.

LR6-60OPD 335~355M

Design (mm)

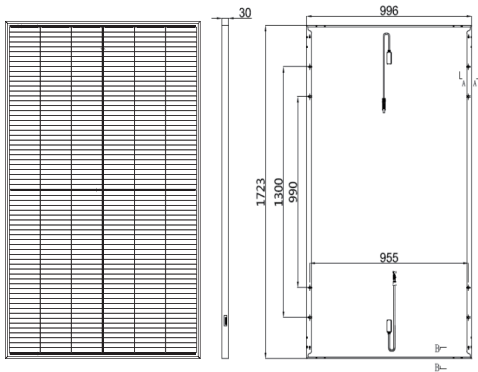

Units: mm(inch)
Tolerance:
Length: ± 2 mm
Width: ± 2 mm
Height: ± 1 mm
Pitch-row: ± 1 mm

Mechanical Parameters

Cell Orientation: 6 parallels & 2 series
Junction Box: IP67, two diodes
Output Cable: 4mm², positive pole 800mm,
negative pole 400mm
Connector: EVO2/PV-ZH202B/PV-LR5
Glass: 2.0mm coated tempered glass
Weight: 23 kg
Dimension: 1723×996×30mm
Packaging: 35pcs per pallet
210pcs per 20'GP
910pcs per 40'HC

Operating Parameters

Operational Temperature: -40 °C ~ +85 °C
Power Output Tolerance: 0 ~ +5 W
Voc and Isc Tolerance: $\pm 3\%$
Maximum System Voltage: DC1500V (IEC)
Maximum Series Fuse Rating: 20A
Nominal Operating Cell Temperature: 45 ± 2 °C
Safety Class: Class II
Bifaciality: $\geq 80\%$

Electrical Characteristics

Test uncertainty for Pmax: $\pm 3\%$

Model Number	LR6-60OPD-335M		LR6-60OPD-340M		LR6-60OPD-345M		LR6-60OPD-350M		LR6-60OPD-355M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	335	248.2	340	251.9	345	255.6	350	259.3	355	263.0
Open Circuit Voltage (Voc/V)	37.9	35.4	38.1	35.6	38.3	35.7	38.5	35.9	38.7	36.1
Short Circuit Current (Isc/A)	11.53	9.29	11.62	9.37	11.72	9.45	11.81	9.52	11.91	9.60
Voltage at Maximum Power (Vmp/V)	31.2	28.8	31.4	29.0	31.6	29.2	31.8	29.4	32.0	29.6
Current at Maximum Power (Imp/A)	10.74	8.61	10.83	8.68	10.92	8.76	11.01	8.83	11.10	8.90
Module Efficiency(%)	19.1		19.4		19.7		20.0		20.3	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20 °C, Spectra at AM1.5, Wind at 1m/s

Electrical characteristics with different rear side power gain (reference to 335W front)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
352	45.0	10.13	36.8	9.57	5%
369	45.0	10.62	36.8	10.02	10%
385	45.1	11.10	36.9	10.48	15%
402	45.1	11.58	36.9	10.93	20%
419	45.1	12.06	36.9	11.39	25%

Temperature Ratings (STC)


Temperature Coefficient of Isc	+0.060%/°C
Temperature Coefficient of Voc	-0.300%/°C
Temperature Coefficient of Pmax	-0.370%/°C

Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

I-V Curve


Current-Voltage Curve (LR6-60OPD-335M)

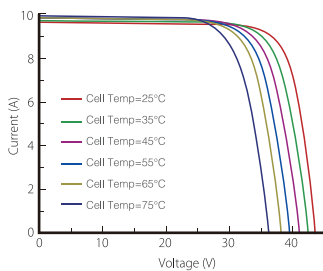

Power-Voltage Curve (LR6-60OPD-335M)



Current-Voltage Curve (LR6-60OPD-335M)



LONGi Solar

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

Made in China or Malaysia or Vietnam 20190701
LONGi Green Energy Technology Co., Ltd.