

SHARP

NU-RC290 | 290 W
Monocrystalline silicon photovoltaic modules

290 W
The high performer



For your independence

Take advantage of solar panels + battery solutions for maximum independence



50 years of solar expertise



Guaranteed positive power tolerance (0/+5 Wp)



Made in Germany



Top PV brand award



Proven Quality
VDE (IEC/EN 61215, IEC/EN61730)
Safety Class II / CE
MCS accredited product
ISO 9001 / ISO 14001



Monocrystalline technology



Product guarantee



Linear performance guarantee



17.6 % module efficiency



Robust product design

Electrical data (at STC)			
NU-RC290			
Maximum power	P_{max}	290	W_p
Open-circuit voltage	U_{oc}	39.3	V
Short-circuit current	I_{sc}	9.8	A
Voltage at point of maximum power	U_{mpp}	31.3	V
Current at point of maximum power	I_{mpp}	9.25	A
Module efficiency	η_m	17.6	%



STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10 % of the indicated values of I_{sc} , U_{oc} , and 0 to +5 W of P_{max} (power measurement tolerance ±3 %).


Electrical data (at NOCT)			
NU-RC290			
Maximum power	P_{max}	212	W_p
Open-circuit voltage	U_{oc}	36.2	V
Short-circuit current	I_{sc}	7.93	A
Voltage at point of maximum power	U_{mpp}	28.4	V
Module efficiency	η_m	16.1	%

NOCT: Module operating temperature at 800 W/m² irradiance, air temperature of 20 °C, AM 1.5, wind speed of 1 m/s. NOCT: 48°C

Limit values		Mechanical data		Temperature coefficient	
Maximum system voltage	1,000 V	Length	1,660 mm	P_{max}	-0.40 %/°C
Over-current protection	20 A	Width	990 mm	U_{oc}	-0.29 %/°C
Temperature range	-40 to 85° C	Depth	50 mm	I_{sc}	0.05 %/°C
Maximum mechanical load	2,400 Pa	Weight	20 kg		

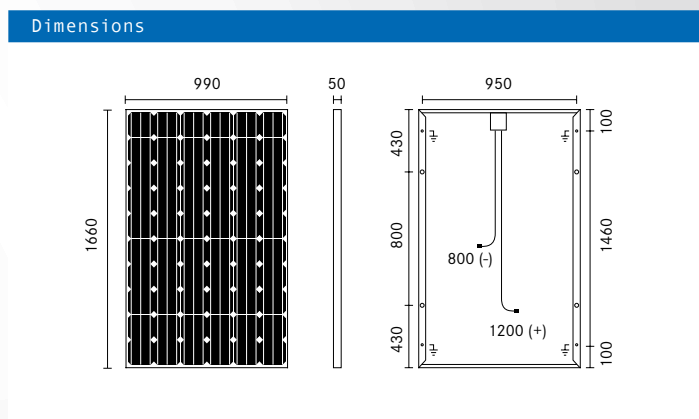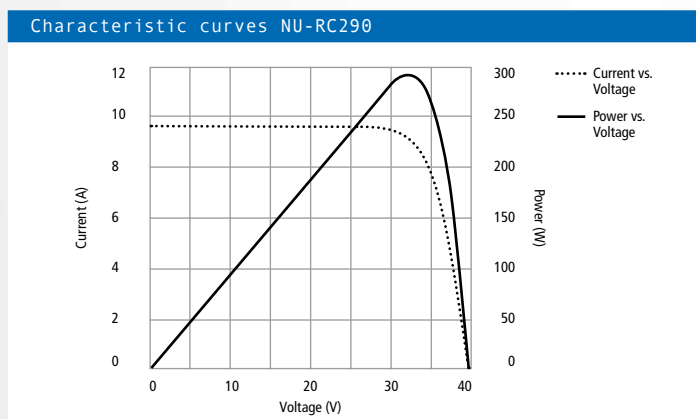

General data		Packaging data	
Cells	monocrystalline, 156 mm × 156 mm, 60 cells in series	Modules per palette	22 pcs
Front glass	low iron tempered glass, 3.2 mm	Palette size (L × W × H)	1.2 m × 1.0 m × 1.85 m
Frame	anodized aluminium alloy, silver	Palette weight	approx. 490 kg
Connection box	PPO/PA, black / Contact Material: Cu, tin plated	Modules packed in one carton	22 pcs
Cable	CE cable, length 1,200 mm(+), 800 mm (-)		
Connector	MC4		



www.sharp.eu



Contact Sharp

SHARP ENERGY SOLUTIONS EUROPE
A DIVISION OF SHARP ELECTRONICS (EUROPE) LTD.
SONNINSTR. 3
20097 HAMBURG
GERMANY
T: +49 (0) 40/2376-2436
F: +49 (0) 40/2376-2193

Contact Installer

Local responsibility: **Benelux** SolarInfo.seb@sharp.eu, **France** SolarInfo.fr@sharp.eu, **Germany** SolarInfo.de@sharp.eu, **Poland** energy-info.pl@sharp.eu
Spain & Portugal SolarInfo.es@sharp.eu, **United Kingdom** SolarInfo.uk@sharp.eu, **Other countries** SolarInfo.Europe@sharp.eu